

3 SERIES

POWERED
STUDIO MONITORS
& SUBWOOFER



**THE FIRST
STUDIO MONITORS**
TO INCORPORATE JBL'S

**IMAGE
CONTROL
WAVEGUIDE**

**FOR INCREDIBLE IMAGING, AND A
ROOM-FRIENDLY BROAD SWEET SPOT**

Introducing the 3 Series Powered Studio Monitors. The first to incorporate JBL's groundbreaking Image Control Waveguide, providing detail and depth like never before. Micro-dynamics in reverb tails, the subtleties of mic placement are clearly revealed. A realistic soundstage creates the tangible sense that there is a center channel speaker. 3 Series' broad, room-friendly sweet spot means everyone in the room hears the same level of dimension and transparency. With legendary JBL transducers, custom-designed power amplifiers, and the waveguide technology from our flagship M2 Master Reference Monitors, the surprisingly affordable 3 Series will boost the image in your studio.



LSR310S
POWERED 10"
STUDIO SUBWOOFER

LSR308
POWERED 8"
STUDIO MONITOR

LSR305
POWERED 5"
STUDIO MONITOR




**JBL'S REVOLUTIONARY
IMAGE CONTROL WAVEGUIDE
IS THE MAGIC OF 3 SERIES INCREDIBLE IMAGING**

The Image Control Waveguide was developed for JBL's new flagship M2 Master Reference Monitor and with the introduction of the JBL 3 Series, is now available for the first time in an affordable, compact reference monitor. Its patent-pending design precisely controls the sound emanating from the speaker in the vertical and horizontal planes ensuring the representation of your mix is neutral and accurate at the listening position.

INCREASED HIGH FREQUENCY DETAIL

3 Series delivers neutral sound across an unusually large working area regardless of room acoustics, so you don't have to be right in front of the speakers to make accurate adjustments to your mix. You'll experience greater depth and ambience in recordings. Subtle details can be heard, even in a dense mix.

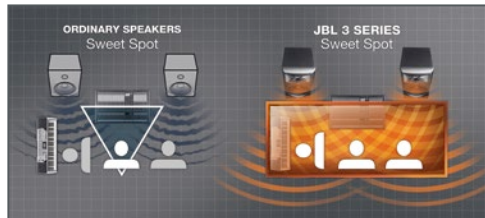

**BIG POWER,
BIG SOUND**

JBL's efficient Class D high and low frequency amplifiers provide ample power giving 3 Series abundant output and dynamic headroom needed for the most demanding production styles.

**TRANSDUCERS THAT
DELIVER THE TRUTH**

JBL Transducers are legendary for their performance. 3 Series long-throw woofers and composite Neodymium tweeters are designed from the ground up to reproduce powerful transients and micro dynamics with deep bass and smooth highs to 24 kHz.

**JBL PATENTED SLIP
STREAM™ PORT**

The patented JBL low frequency port design works in concert with the 3 Series woofers for accurate bass response at all playback levels. The double-flared shape of the port is precisely calculated for greater low-frequency extension.



**LSR310S
POWERED STUDIO
SUBWOOFER
WITH XLF**

Extend your system LF all the way down! The LSR310S subwoofer incorporates JBL's patented Slip Stream™ Port working in concert with a custom 10" down-firing driver and a 200 Watt amplifier to add deep, powerful bass to any studio monitor system. A JBL first, the **XLF Extended Low Frequency** setting lets you hear your tracks with the augmented bass tuning used in today's dance clubs.




LSR305
5" POWERED
STUDIO MONITOR

Frequency Range: 43 Hz - 24 kHz
Crossover: 1675 Hz 4th Order
Acoustic Linkwitz-Riley
Max Peak SPL: 108 dB
Amplifier Power: 82 W
HF Trim Control: +2 dB, 0, -2 dB
LF Trim Control: +2 dB, 0, -2 dB
Maximum Peak Input Level: +23 dBu
AC Voltage: 100-240 VAC +/- 10% 50/60 Hz
Input Types: 1 x XLR, 1 x TRS Balanced



LSR308
8" POWERED
STUDIO MONITOR

Frequency Range: 37 Hz - 24 kHz
Crossover: 1800 Hz 4th Order
Acoustic Linkwitz-Riley
Max Peak SPL: 112 dB
Amplifier Power: 112 W
HF Trim Control: +2 dB, 0, -2 dB
LF Trim Control: +2 dB, 0, -2 dB
Maximum Peak Input Level: +23 dBu
AC Voltage: 100-240 VAC +/- 10% 50/60 Hz
Input Types: 1 x XLR, 1 x TRS Balanced



LSR310S
10" POWERED
STUDIO
SUBWOOFER

Driver: 250mm (10-inch)
High-Excursion, Down-Firing
Low Frequency Extension: 27 Hz
Max Peak SPL: 113 dB
Amplifier Power: 200 W Class D
Crossover Settings: 80 Hz, **XLF**, External
Inputs: 2 x XLR, 2 x TRS Balanced
Outputs: 2 x XLR
Maximum Peak Input Level: +20.3 dBu
AC Voltage: 100-240 VAC +/- 10% 50/60 Hz
Dimensions (HxWxD):
448 mm x 381 mm x 398 mm
(17.65 in x 15 in x 15.65 in)
Weight: 15.6 kg / 34.3 lbs



Learn more at jblpro.com/3series

